



AHTW-2D-220-280-H

ANCHOR HANDLING TOWING WINCH

SPECIFICATION


EITHER UPPER DRUM OR LOWER DRUM

Drum Capacity	: 1400m x Φ 58mm S.W.R (10 layers)
Duty Pull	: 220T x 0~8m/min
(1st layer)	: 110T x 0~16m/min
	: 75T x 0~23m/min
	: 35T x 0~48m/min
Dynamic Braking	: 220T x 0~12m/min
(1st layer)	: 110T x 0~20m/min
	: 75T x 0~30m/min
	: 35T x 0~58m/min
Cable Lifter	: 115T x 0~16m/min
	: 40T x 0~45m/min
Drum Brake Holding	: 280T (static @ 1st layer)
Drum Brake Assembly	: Spring loaded hydraulic release band brake
Drum Clutch	: Jaw type, hydraulic operated
Control	: Local control near to winch
	: Remote control in wheelhouse



AHTW-2D-220-280-H

ANCHOR HANDLING TOWING WINCH

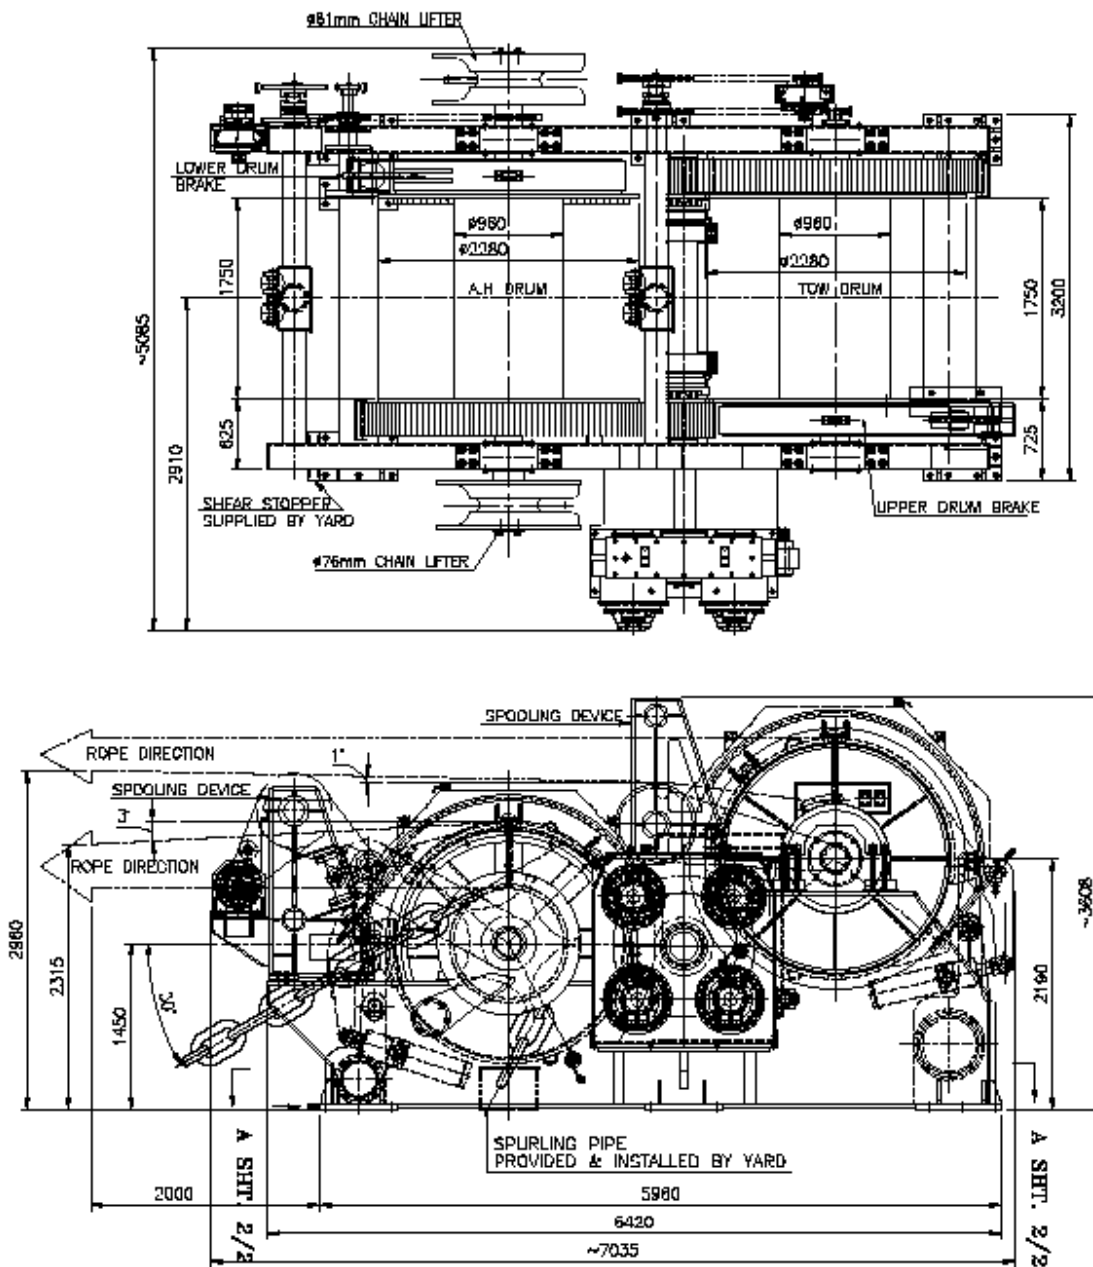

Landscape City, 5-1-302, The forth street TEDA, TianJin, China 300457 天津开发区第四大街伴景湾家园 5-1-302

Tel 电话 : 86-22-66372115

Fax 传真 : 86-22-66372117

Linkman 联系人 : 韩大为

Email 电邮 : han@sinolinker.net